




A Filtration Group Company

# JFG 36-CE-MP1

The JFG 36-CE-MP1 are outside to inside flow direction ion elements specifically designed for gas filtration. Through the combination of a specialized glass fiber coalescing media in a varying scale of fiber diameters, this graded density depth style design provides the optimum combination of solid contaminant holding capability and liquid particle coalescing capability. The glass filter media is supported with a heavy-duty, spiral locked steel core. Steel end caps are then mechanically secured, to center core providing cartridge strength you can trust not to collapse or bypass when properly applied.

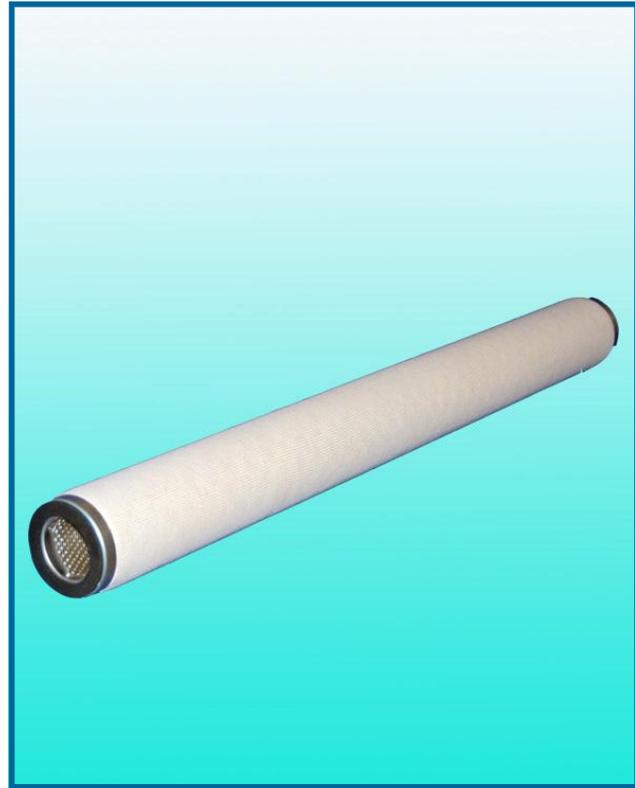

JFG 36-CE-MP1 Filter Cartridges

## Performance

Standard Micron Rating	0.3 $\mu$
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15 psid
Maximum Operating Temperature	275° F
Burst Pressure	> 75 psid
Flow Direction	Outside to In
Configuration	Single Open End

## Materials

<b>Coalescing Media:</b>	Fiberglass
<b>Support:</b>	Cotton
<b>Core:</b>	Tinned Steel
<b>End Caps:</b>	Tinned Steel
<b>Gaskets:</b>	Buna

## Dimensions

Length	36
Outside Diameter	3.5
Inside Diameter	2.09
Flow Pattern	Outside to In
Quantity	4 per box
Approx. Shipping Wt.	11 lbs. per box
Box Dimensions	7.5ö x 7.5ö x 36.5ö

*\*Above dimensions are nominal in inches*

*\*For Custom Engineered Products and Solutions... Consult Factory*



A Filtration Group Company

900 Industrial Pkwy P.O. Box 1092  
Breckenridge Texas 76424 USA  
Telephone: 254-559-7591  
Fax: 254-559-9863  
sales@jonellinc.com

Visit us at [www.jonellinc.com](http://www.jonellinc.com)

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.