



A Filtration Group Company

# JPMK 36229-25-X

The Jonell JPMK 36229-25-X filter cartridges are high efficiency, outside to inside flow direction elements specifically designed for the removal of solid contaminant in critical applications.

JPMK's are available in various grades of high performance cellulose/synthetic media with hardware customizable to suit your application.

## Performance

Standard Micron Rating	25 $\mu$
Recommended Initial DP	< 0.5 psid
Recommended Change-Out DP	15-25 psid
Maximum Temperature	240°F
Collapse Pressure	> 150 psid
Flow Direction	Outside to Inside
Configuration	Single Open End


## Materials

<b>Media:</b>	Cellulose/Polyester
<b>Core:</b>	Tinned Steel
<b>Supports:</b>	Tinned Steel
<b>End Caps:</b>	Nylon
<b>Gaskets:</b>	Buna

Jonell  
900 Industrial Pkwy P.O. Box 1092  
Breckenridge Texas 76424 USA  
Telephone: 254-559-7591  
Fax: 254-559-9863  
sales@jonellinc.com



**Filtration Group®**  
Cartridge & Coalescer

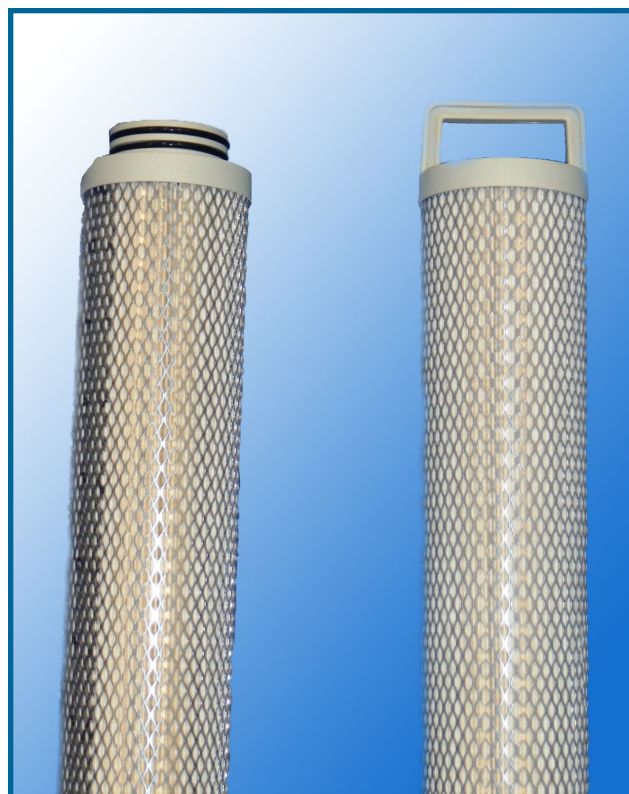

JPMK 36229-25-X Filter Cartridges

## Dimensions

Length	36.1 inches
Outside Diameter	3.7 inches
Inside Diameter	1.3 inches
Flow Pattern	Outside to Inside
Quantity	4 per box
Approx. Shipping Wt.	11 lbs. per box
Box Dimensions	39.5" x 8" x 8"

*\*Above dimensions are nominal in inches*

Visit us at [www.jonellinc.com](http://www.jonellinc.com)

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

ISO 9001:2008  
Certified